


ALL DIMENSION ARE IN mm.

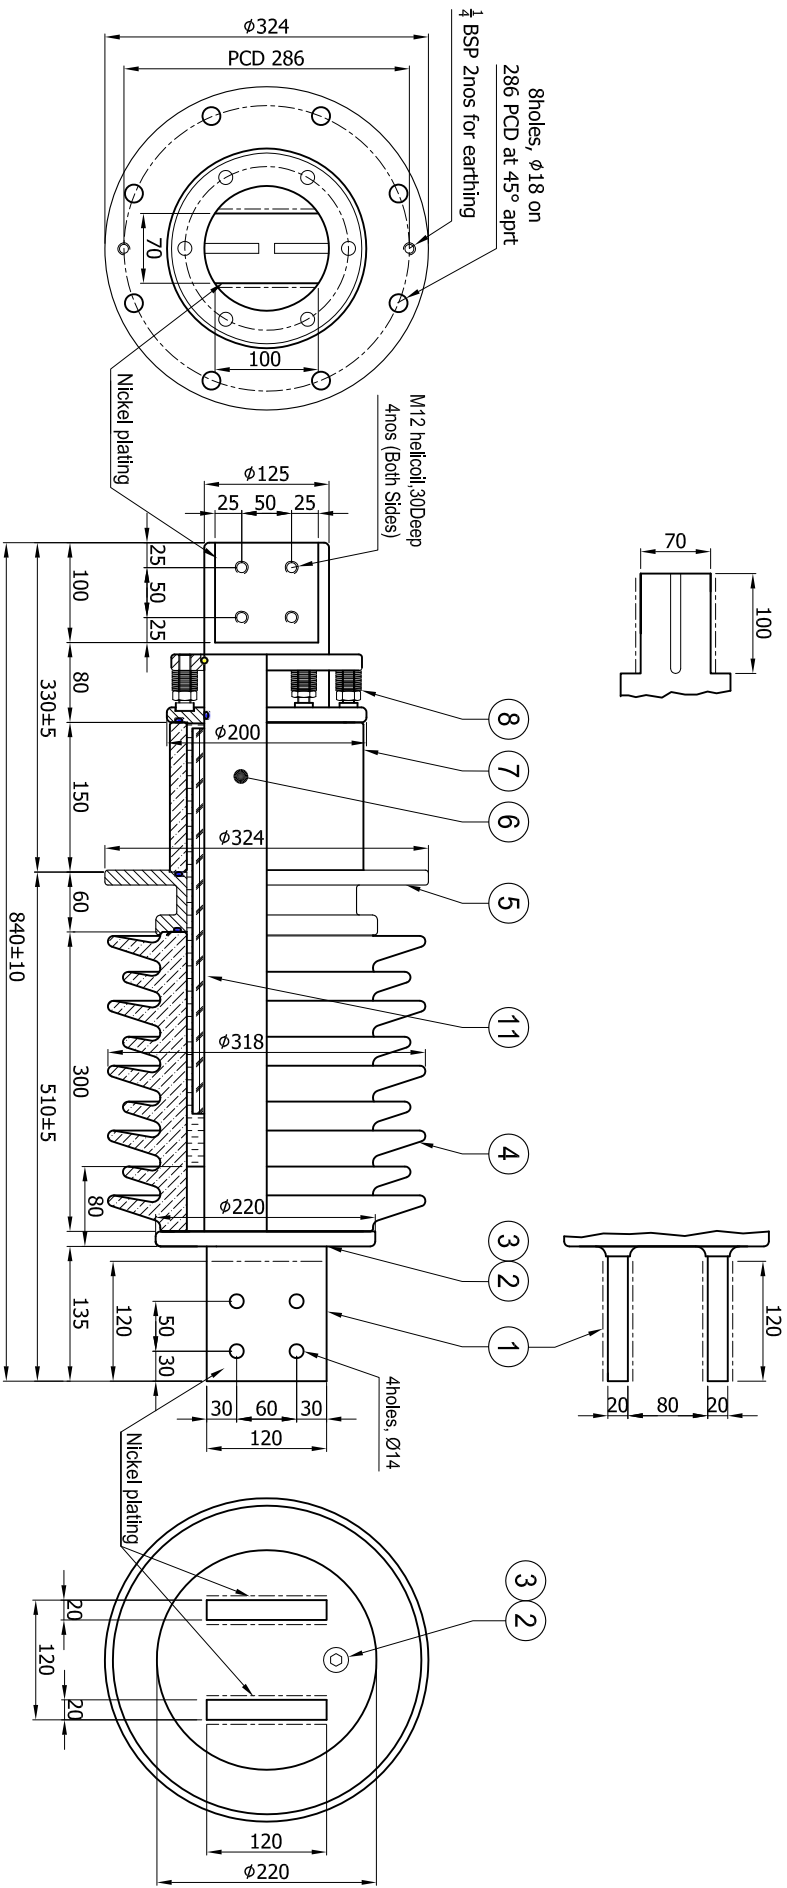

PARTS				
NO	DESCRIPTION	QTY	MATERIAL	FINISH
1	Air end terminal	2	Aluminium alloy	Nickel plated
2	Oil filling plug	1	SS	
3	Gasket	1	Viton	
4	Upper insulator	1	Porcelain	
5	Mounting flange	1	Aluminium alloy	Powder coated
6	Center conductor	1	Aluminium alloy	
7	Lower insulator	1	Porcelain	
8	Spring assembly	6	Steel EN47	
10	Bottom terminal	1	Aluminium alloy	Nickel plated
11	Condenser Core	1	OIP	

TECHNICAL DATA	
Model	HCA-3663
Standard	IEC 60137
Rated voltage	36 kV
Rated current	6300 Amps
Basic insulation level	170 kVp
1 min. AC test voltage	70 kV
Total creepage length	900 mm
Short time current	200 kA, 2 Sec.
Cantilever withstand	3150 N

GENERAL	
Type	: OIP Condenser
Mounting	: $\leq 30^\circ$ to vertical
Approx. wt	: 70 kg
Quantity oil	: 1.5 ltr.
Terminal	: Aluminium alloy
Finish of contact area	: Nickel plated

DRN	Tejas		GUJARAT, INDIA.
CHK	Eshta		
APPD	DZ		36kV 6300A High Current Bushing
DATE	15-10-2013		
CUST	: VIJAI ELECTRICAL	CODE	: YHCBS00000
DRG NO	: HCA036063100	REV	: 0

Ref: HOA036050103

SCALE :- 1:1